


# Sollysta Wiring Accessories Metalclad

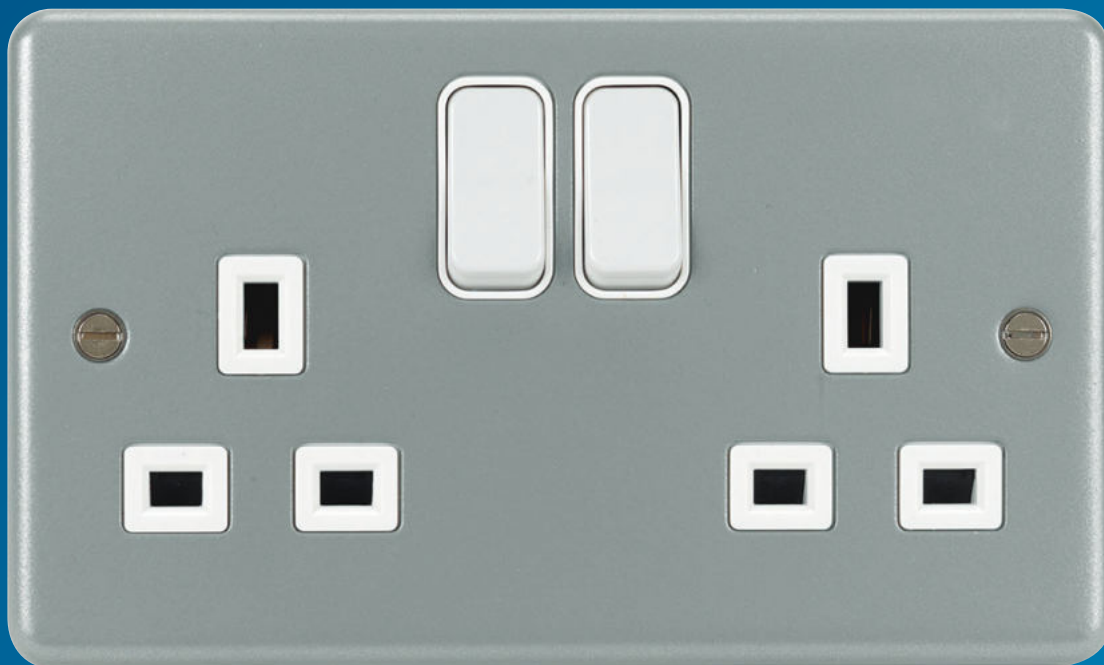

**:hager**

Hager Electro Systems Pte Ltd

12, Tai Seng Street, #06-01B, Luxasia Building, Singapore 534118

Tel : + (65) 6383 1030

Fax: + (65) 6383 0230

Email: [sales@hager.sg](mailto:sales@hager.sg)

Web: [www.hager.sg](http://www.hager.sg)

# Sollysta Metalclad

For those tougher environments, the sollysta metalclad range still remains loyal to its origins. Combining durability as well as aesthetics, the back boxes are made from specially hardened steel to maintain their rigidity, the faceplates overlap a lip on the back box sitting flush for a smooth high quality finish, and a strong two tab knock out makes installation as easy as possible.


Traditional grey finish with back boxes, the range gives you maximum flexibility in both application and installation.

## The advantages for you:

- Knock outs easily and cleanly removed
- Products are independently tested and certified by independent laboratories
- Traditional grey finish to suit all applications
- Reliable for all applications where a hard wearing product is required
- Same sollysta mechanisms inside

## Technical data:

- Switches comply with IEC 60669-1
- Sockets comply with SS145 and SS472
- Sockets with USB comply with BS1363-2
- Boxes manufactured from specially hardened SGCC steel.
- Patented LOOP terminal to allow Neutral looping at the switch.
- Surface finish is durable epoxy powder coat.

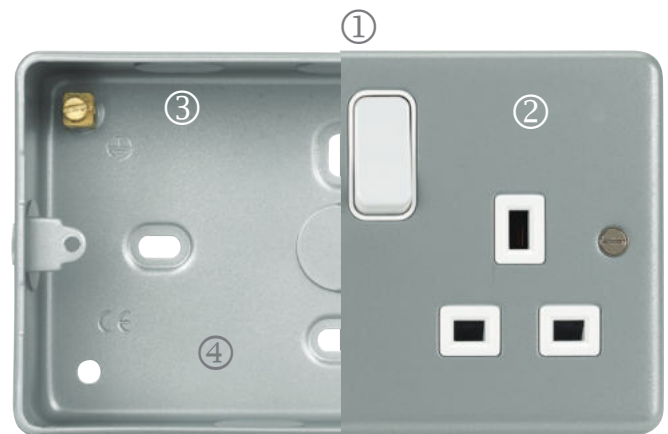

### 1. Secure Fit

Front plates sit flush to the edge of the back box and locate positively with the lip around the edge.



### 2. Finish

The metalclad range is tough and durable thanks to the epoxy painted finish.



### 3. Back Box Knockouts

All of our back boxes are available with knockouts.



### 4. Back Box Rigidity

All of our back boxes are made from hardened steel to ensure increased rigidity.



WPPS12

- Unique patented LOOP terminal to allow Neutral looping at the switch.
- Complies with IEC 60669-1, a.c. only.
- 'X' rated - No need to derate for fluorescent loads.
- Two way switches can be wired either 1 way or 2 way.
- Clear terminal markings:  
1-way L1  
2-way L2
- Capacity of each terminal 2 x 4.0mm<sup>2</sup> conductors.



WPPS22




WPPS32

	Pack/ Qty	Cat. Ref.
50A Double Pole Switch 1 Gang cw LED	10	<b>WPDP50N</b>
20A Double Pole Switch cw Flex Outlet	10	<b>WPDP84FO</b>
20A Double Pole Switch cw LED & Flex Outlet	10	<b>WPDP84FON</b>
10AX 1 Gang 2 Way Wall Switch	10	<b>WPPS12</b>
10AX 2 Gang 2 Way Wall Switch	10	<b>WPPS22</b>
10AX 3 Gang 2 Way Wall Switch	10	<b>WPPS32</b>
10AX Push Switch	10	<b>WPPS12R</b>
10AX 1 Gang 2 Way Wall Switch Red Rocker & Box cw KOs	10	<b>WPPS12RR</b>
10AX 2 Gang 2 Way Wall Switch Red Rocker & Box cw KOs	10	<b>WPPS22RR</b>
10AX 3 Gang 2 Way Wall Switch Red Rocker & Box cw KOs	10	<b>WPPS32RR</b>
10AX Intermediate Switch	10	<b>WPPS16</b>



WPSS81



WPSS82



WPSS82-USB

## Metalclad Grey Socket Outlets

- Unique patented 3 part safety shutter.
- Complies with  
SS145-2: 13A SSO  
BS1363-2: 13A SSO with USB  
SS472 : 15A SSO
- Double pole switching mechanism on switched sockets.
- Twin socket comes with twin earth as standard.
- USB output 5Vdc 2.4A total max. with intelligent connection ensures optimum charging performance.
- All terminal screws grouped in-line and upward facing for ease of installation.
- Clear printed and engraved terminal markings.
- Capacity of each terminal: 3 x 4mm<sup>2</sup> conductors.

	Pack/ Qty	Cat. Ref.
1 Gang Double Pole Switched Socket	10	<b>WPSS81</b>
1 Gang Double Pole Switched Socket cw LED	10	<b>WPSS81N</b>
2 Gang Double Pole Switched Socket	5	<b>WPSS82</b>
2 Gang Double Pole Switched Socket cw LED	5	<b>WPSS82N</b>
2 Gang Double Pole Switched Socket Outboard Rockers	5	<b>WPSS82O</b>
15A Double Pole Switched Socket	10	<b>WPSS115</b>
1 Gang DP Switched Socket Red Rocker & Box cw KOs	10	<b>WPSS81R</b>
2 Gang DP Switched Socket Red Rocker & Box cw KOs	5	<b>WPSS82R</b>
2 Gang DP Switched Socket with Twin USB Ports & Box cw KOs	5	<b>WPSS82-USB</b>



WPSSU83FON

## Metalclad Grey 13A Fused Connection Units

- Complies with BS 1363-4.
- Cable clamp accommodates up to 1.5mm<sup>2</sup> flexible cord.
- Single screw fast fix cable clamp.
- Available with LED light indicator in rocker.
- All terminal screws upward facing for ease of installation.
- Clearly printed terminal markings.
- Capacity of each terminal 2 x 6.0 mm<sup>2</sup> conductors.

	Pack/ Qty	Cat. Ref.
13A FCU UnSwitched cw Flex Outlet	10	<b>WPSU83FO</b>
13A FCU Switched cw Flex Outlet	10	<b>WPSSU83FO</b>
13A FCU Switched cw LED & Flex Outlet	10	<b>WPSSU83FON</b>



WPP1EU

- Carrier plates facilitate installation of industry standard modular data outlets.
- Easy to configure for all applications.
- Easy installation of module to plate.
- Robust retention of modules in operation.
- Quick release of modules for maintenance.

	Size (Gang)	Pack/ Qty	Cat. Ref.
1 Module Euro Plate	1	10	<b>WPP1EU</b>
2 Module Euro Plate	1	10	<b>WPP2EU</b>
4 Module Euro Plate	2	5	<b>WPP4EU</b>



WMMRJ45



WMMUSB

## Euro Modules

	No. of Modules	Pack/ Qty	Cat. Ref.
RJ11	1	1	<b>WMMRJ11</b>
RJ45 Cat 6 UTP	1	1	<b>WMMRJ45</b>
Single Satellite & Connector	1	1	<b>WMMSAT</b>
Twin USB	2	1	<b>WMMUSB</b>
Single Blank Euromodule	1	1	<b>WMMB</b>



WPGP1

## Metalclad Grey Grid Plates

	Size (Gang)	Pack/ Qty	Cat. Ref.
Grid plate 1 Gang	1	10	<b>WPGP1</b>
Grid plate 2 Gang	1	10	<b>WPGP2</b>
Grid plate 3 Gang	2	5	<b>WPGP3</b>
Grid plate 4 Gang	2	5	<b>WPGP4</b>
Grid plate 6 Gang	2 x 2 Rows	5	<b>WPGP6</b>
Grid plate 8 Gang	2 x 2 Rows	5	<b>WPGP8</b>



WGMF1

WGMF2

## Grid Frame

### Frames for Grid Plates

	No. of Modules	Pack/ Qty	Cat. Ref.
1 Gang Frame	1	20	<b>WGMF1</b>
2 Gang Frame	2	20	<b>WGMF2</b>
3/4 Gang Frame	1	10	<b>WGMF34</b>



WGMF34



WMGSDP2

## Grid Switches

	No. of Modules	Pack/ Qty	Cat. Ref.
20A 1 Way Double Pole Switch - Standard	1	10	<b>WMGSDP2</b>



WPB140KO

## Metalclad Grey Accessories

	Pack/ Qty	Cat. Ref.
Single Backbox	10	<b>WPB140KO</b>
Twin Backbox	5	<b>WPB240KO</b>
Two Row Twin Backbox	5	<b>WPB6840KO</b>
Single Blank Plate	10	<b>WPP1BKO</b>
Twin Blank Plate	5	<b>WPP2BKO</b>

Distributed By

**Choo Chiang Marketing Pte Ltd**

(a subsidiary of Choo Chiang Holdings Ltd)

Tel: +65 6368 5922 | fax: +65 6363 5922

Head Office: 10 Woodlands Loop S(738388)

website: [www.choochiang.com](http://www.choochiang.com) | facebook: [facebook.com/choochiang.sg](https://facebook.com/choochiang.sg)



**CHOO CHIANG**

SINGAPORE  
QUALITY CLASS



**bizSAFE<sub>3</sub>**

**ISO9001**  
CERTIFIED