

Self- contained White LED Emergency Twin Light




Designed with low EMI and specially equipped with a customised proprietary Hybrid IC for higher reliability and greater efficiency in operation. Compact, lightweight, easy to install, portable and caters to a variety of usages. Adjustable twin lamps allows flexibility in various angle of projection.

Suitable for Shops, Supermarkets, Factories, Schools, Banks, Computer Rooms, Offices, Public Halls, Restaurants, Hospitals, etc.

Technical info

Input Voltage	230/240Vac 50/60Hz +10% or 115Vac 50/60Hz +10% or others
Battery	2.4V 2.5AH High temp rated Nickel Cadmium cells.
Lamp Used	2 x SMT NICHIA White LED
Rated Period	> 2 hours, 3 hours or others
Mode	Non-maintained
Operation Temperature	ta 40 °C
Power Consumption	< 4VA
Charge Monitor	Super Bright Green LED 5mm Ø
Recharge Period	16 ~ 24 hrs
Emergency Luminance	> 3,000mcd/m ²
Electromagnetic Field	8.7m gause @ 0.1m
Charger	Hybrid controlled charger
Protection	Low volt cut-off to prevent battery over discharge
	Incoming AC fuse and Battery DC fuse
	Tropical climate protection coating on hybrid control circuit
Construction	Mounted Fire Retardant ABS housing
	20mm Ø K/O hole, Fire Retardant ABS Lamp Head
Dimension	305mm(L) x 95mm(W) x 136mm(H)
Weight	2.80kg (Net) / 3.00kg (Gross)
Packing	One unit per carton
Carton/Dimension	Double wall corrugated / 315mm(L) x 100mm(W) x 145mm(H)
Compliance	SS 563: Part 1: 2010, SS 563 Part 2: 2010 and
	SS IEC 60598-2-22: 2016
Warranty	1 Year

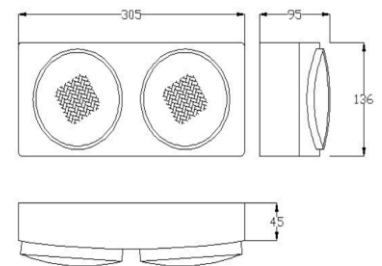

HYBRID IC CONTROLLED SELFCONTAINED EMERGENCY LED TWIN LIGHT SUPER BRIGHT 1W SMT NICHIA WHITE LED LAMP LOW POWER CONSUMPTION

Stock code

No.	Description
EXLTLEDP.CCM	CCM CTL201P-LED EMERGENCY LIGHT (PSB)

(1) Other signs are available upon request
(2) Colors are available upon request

Note
Due to continuous development and improvement, our company reserves the right to change specification without notice.