


3C X 40/0.076 PVC FLEX CABLE

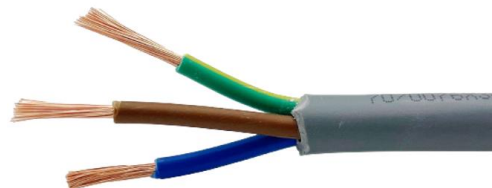

Technical info


PVC sheathed flexible cord(40YARD)		Type:3C×40(TA)		
standard:GB/T5023-2008		Length:40YARD		
Item		requirement:	Result	Conclusion
Conductor	The number	3×40	3×40	Pass
	Diameter(mm)	≤0.21	0.125	Pass
Insulation	AVG(mm)	≥0.6	0.8	Pass
	Mix(mm)	≥0.44	0.67	Pass
Sheath	AVG(mm)	≥0.8	1.0	Pass
	Mix(mm)	≥0.58	0.82	Pass
Outer diameter(mm)		7.3	7.3	Pass
Logo		CRM		
Test Conclusion		The inspected items meet the requirements of the standard GB/T5023-2008 in China.		

Stock code

No.	Description
CAF340.	CRM 3C X 40/0.076 PVC FLEX CABLE
CAF340.H	CRM 3C X 40/0.076 PVC FLEX CABLE (W)
CAF340.D	CRM 3C X 40/0.076 PVC FLEX CABLE(BK)

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.

3C X 70/0.076 PVC FLEX CABLE

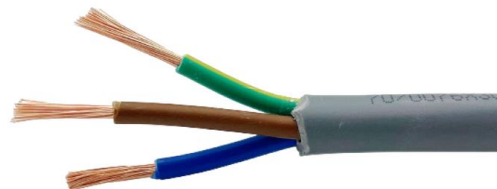

Technical info


PVC sheathed flexible cord(40YARD)		Type:3C×70(TA)		
standard:GB/T5023-2008		Length:40YARD		
Item		requirement:	Result	Conclusion
Conductor	The number	3×70	3×70	Pass
	Diameter(mm)	≤0.21	0.125	Pass
Insulation	AVG(mm)	≥0.6	0.8	Pass
	Mix(mm)	≥0.44	0.65	Pass
Sheath	AVG(mm)	≥0.8	1.1	Pass
	Mix(mm)	≥0.58	0.86	Pass
Outer diameter(mm)		8.0	8.3	Pass
Logo		CRM		
Test Conclusion		The inspected items meet the requirements of the standard GB/T5023-2008 in China.		

Stock code

No.	Description
CAF370.	CRM 3C X 70/0.076 PVC FLEX CABLE
CAF370.H	CRM 3C X 70/0.076 PVC FLEX CABLE (W)
CAF370.D	CRM 3C X 70/0.076 PVC FLEX CABLE(BK)

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.

3C X 110/0.076 PVC FLEX CABLE

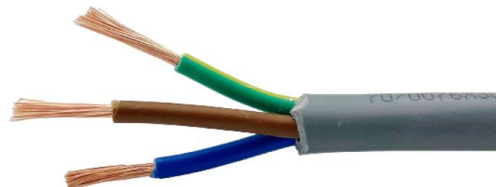

Technical info


PVC sheathed flexible cord(40YARD)		Type:3C×110(TA)		
standard:GB/T5023-2008		Length:40YARD		
Item		requirement:	Result	Conclusion
Conductor	The number	3×110	3×110	Pass
	Diameter(mm)	≤0.26	0.125	Pass
Insulation	AVG(mm)	≥0.7	1.1	Pass
	Mix(mm)	≥0.53	0.97	Pass
Sheath	AVG(mm)	≥0.9	1.3	Pass
	Mix(mm)	≥0.67	1.16	Pass
Outer diameter(mm)		10.8	10.9	Pass
Logo		CRM		
Test Conclusion		The inspected items meet the requirements of the standard GB/T5023-2008 in China.		

Stock code

No.	Description
CAF3110.	CRM 3C X 110/0.076 PVC FLEX CABLE

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.

4C X 40/0.076 PVC FLEX CABLE

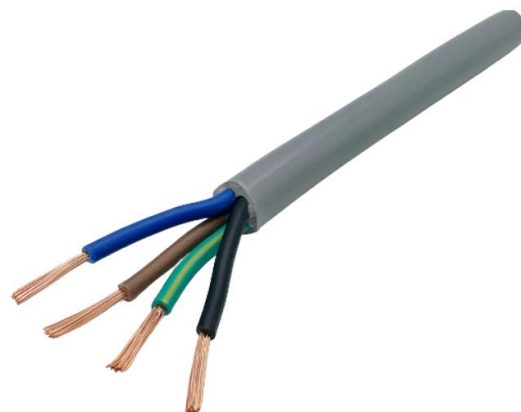

Technical info


Name:PVC sheathed flexible cord(40YARD)		Type:4C×40(TA)		
standard:GB/T5023-2008		Length:40YARD		
Item		requirement:	Result	Conclusion
Conductor	The number	4×40	4×40	Pass
	Diameter(mm)	≤0.21	0.125	Pass
Insulation	AVG(mm)	≥0.6	0.8	Pass
	Mix(mm)	≥0.44	0.65	Pass
Sheath	AVG(mm)	≥0.8	1.2	Pass
	Mix(mm)	≥0.58	1.03	Pass
Outer diameter(mm)		8.2	8.5	Pass
Logo		CRM		
Test Conclusion		The inspected items meet the requirements of the standard GB/T5023-2008 in China.		

Stock code

No.	Description
CAF440.GL-	CRM 4C X 40/0.076 PVC FLEX CABLE

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.

4C X 70/0.076 PVC FLEX CABLE

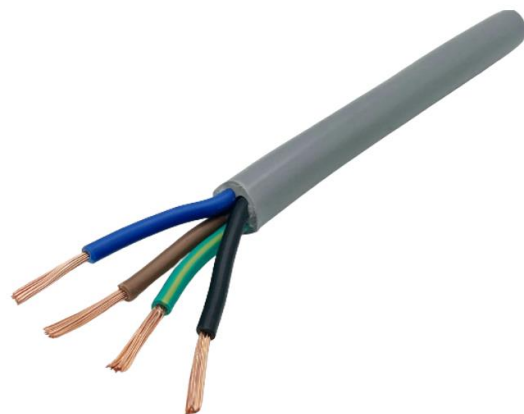

Technical info


PVC sheathed flexible cord(40YARD)		Type:4C×70(TA)		
standard:GB/T5023-2008		Length:40YARD		
Item		requirement:	Result	Conclusion
Conductor	The number	4×70	4×70	Pass
	Diameter(mm)	≤0.21	0.125	Pass
Insulation	AVG(mm)	≥0.6	0.8	Pass
	Mix(mm)	≥0.44	0.65	Pass
Sheath	AVG(mm)	≥0.9	1.0	Pass
	Mix(mm)	≥0.67	0.88	Pass
Outer diameter(mm)		8.7	8.9	Pass
Logo		CRM		
Test Conclusion		The inspected items meet the requirements of the standard GB/T5023-2008 in China.		

Stock code

No.	Description
CAF370.	CRM 3C X 70/0.076 PVC FLEX CABLE
CAF370.H	CRM 3C X 70/0.076 PVC FLEX CABLE (W)
CAF370.D	CRM 3C X 70/0.076 PVC FLEX CABLE(BK)

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.

4C X 110/0.076 PVC FLEX CABLE

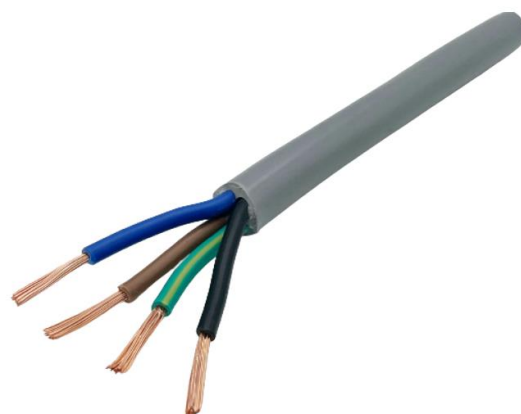

Technical info

PVC sheathed flexible cord(40YARD)		Type:4C×110(TA)		
standard:GB/T5023-2008		Length:40YARD		
Item		requirement:	Result	Conclusion
Conductor	The number	4×110	4×110	Pass
	Diameter(mm)	≤0.26	0.125	Pass
Insulation	AVG(mm)	≥0.7	1.2	Pass
	Mix(mm)	≥0.53	1.05	Pass
Sheath	AVG(mm)	≥1.0	1.4	Pass
	Mix(mm)	≥0.75	1.22	Pass
Outer diameter(mm)		12.0	12.3	Pass
Logo		CRM		
Test Conclusion		The inspected items meet the requirements of the standard GB/T5023-2008 in China.		

Stock code

No.	Description
CAF4110.GL-	CRM 4C X 110/0.076 PVC FLEX CABLE

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.