

T5 LED Fixture



Technical Info

Power	4W	8W	10W	14W
Kyneb	320KM+10%	640KM+10%	800KM+10%	1120KM+10%
Input Voltage	AC220-240V			
Op.Ambient Temp	0-45°C			
CRI	> 80			
Beam Angle	130°			
CCT	3000K/ 4000K /6500L			
Dimensions	A:310mm B:36mm C:22.5mm	A:570mm B:36mm C:22.5mm	A:870mm B:36mm C:22.5mm	A:1170mm B:36mm C:22.5mm

Seamless joints, no over-lapping required and no dark spots.

Slim design, saves energy


High quality driver

High lumen output LED with good colour rendition

3-pin design for added safety

Full set of accessories. Long 30cm double head cable

Applications : cove lighting, shops, hotels, showrooms, arts, museums and others

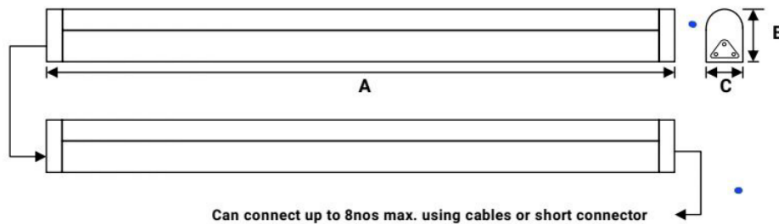

Stock Code

No.	Description
FF-4T5LEDW.CCM	CCM 4W 1FT T5 LED FTG (3PIN) W TUBE (3000K)
FF-4T5LEDC.CCM	CCM 4W 1FT T5 LED FTG (3PIN) W TUBE (4000K)
FF-4T5LEDD.CCM	CCM 4W 1FT T5 LED FTG (3PIN) W TUBE (6500K)
FF-8T5LEDW.CCM	CCM 8W 2FT T5 LED FTG (3PIN) W TUBE (3000K)
FF-8T5LEDC.CCM	CCM 8W 2FT T5 LED FTG (3PIN) W TUBE (4000K)
FF-8T5LEDD.CCM	CCM 8W 2FT T5 LED FTG (3PIN) W TUBE (6500K)
FF-10T5LEDW.CCM	CCM 10W 3FT T5 LED FTG (3PIN) W TUBE (3000K)
FF-10T5LEDC.CCM	CCM 10W 3FT T5 LED FTG (3PIN) W TUBE (4000K)
FF-10T5LEDD.CCM	CCM 10W 3FT T5 LED FTG (3PIN) W TUBE (6500K)
FF-14T5LEDW.CCM	CCM 14W 4FT T5 LED FTG (3PIN) W TUBE (3000K)
FF-14T5LEDC.CCM	CCM 14W 4FT T5 LED FTG (3PIN) W TUBE (4000K)
FF-14T5LEDD.CCM	CCM 14W 4FT T5 LED FTG (3PIN) W TUBE (6500K)

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.