

NXB-125 Moulded case circuit breaker

1. Compliant standards

IEC/EN60947-2

2. Compliant certification

CE

3. Major function

Overload protection, short circuit protection, positive isolation

4. Technical parameters

Rated current: 63A, 80A, 100(1P, 2P, 3P, 4P), 125A(1P, 2P) ;

Rated voltage: 230V ~ (1P), 400V ~ (2P, 3P, 4P);

Frequency: 50/60Hz

Thermal magnetic release: C: 8In, D:12In

Number of poles: 1P, 2P, 3P, 4P;

Mechanical life: 20000 cycles;


Electrical life: 6000 cycles ($I_n \leq 100A$); 4000 cycles ($I_n > 100A$);

Rated short-circuit breaking capacity(Icu): 10kA;

Short-circuit breaking capacity(Ics): 7.5kA;

Rated impulse withstand voltage(Uimp): 4kV;

5. Dimensions and installation sizes

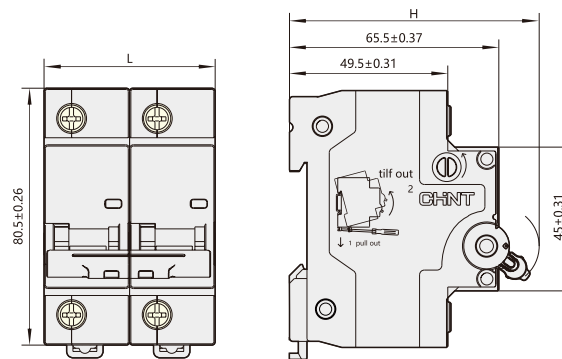

	1P	2P	3P	4P
L(mm)	27 ⁰ _{-0.52}	54 ⁰ _{-0.74}	81 ⁰ _{-1.40}	108 ⁰ _{-1.40}
H(mm)	75.5 ⁰ _{-1.20}	78.5 ⁰ _{-1.20}	78.5 ⁰ _{-1.20}	78.5 ⁰ _{-1.20}

Distributed By:

Choo Chiang Marketing Pte Ltd

(a subsidiary of Choo Chiang Holdings Ltd)

did: +65 6368 5922 | fax: +65 6363 5922

Head Office: 10 Woodlands Loop S(738388)

website: www.choochiang.com | facebook: facebook.com/choochiang.sg

