

EMERGENCY LIGHT IP65



IP65




Surface Mount
Wide Angle
Emergency Luminaire



Technical info

Parameter	Specification
Mode Of Operation	Non-Maintained
Lamp	2 x 3W High Power White LED Module
Rated Duration	3 hrs and others
Mains Supply	230 Volts, 50/60Hz
Power Consumption	<1.5W
Battery	Lithium Iron Phosphate
Charge Monitor	Green LED
Test Facility	Tactile Switch
Safety Feature	Low volt cut-off preventing battery overdischarge
Fitting Construction	Injection moulded fire retardant high impact polycarbonate. The adjustable fire-retardant lamp-heads allow flexibility in angle of projection.Lamp heads comes with anti-glare cover
Mounting	Wall
Cable Entry	Ø20mm K/O hole
Weight	0.72kg(gross)
Compliance	SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	1 year

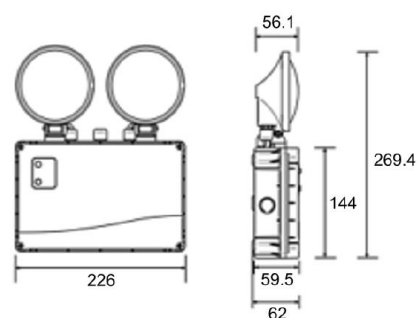

Dimension: mm NTS
High Power L.E.D

Stock code

No.	Description
EXLTLATLEDWP.CCM	CCM MTL/NM/L203 LI WP EMERGENCY LIGHT IP65



Type and batch tested with
PSB PLS-LISTED LABEL

Due to continuous development and improvement, our company reserves the right to change specification without notice.