


# CC12D Voltage Detector



## Product Info

Detection voltage range	From 12v to 1000v
Frequency range	50Hz/60Hz
Alarm mode	Sound and light alarm
Flashlight	White LED lighting
NGV sensitivity	Sensitivity can be increased by increasing the sensitivity button
NCV sensitivity indication mode	High, medium and low sensitivity are indicated by different frequency alarm sound and different color LED.
Operating temperature	0° ~ 40°
Storage temperature	10° ~ 50°
Altitude	< 2000m
Security level	CE CAT. II 1000V/CATIV 600V
Batteries	2x1.5V AAA battery
Product size	155.5mm X 24mm
The product weight	70g

## Panel description:

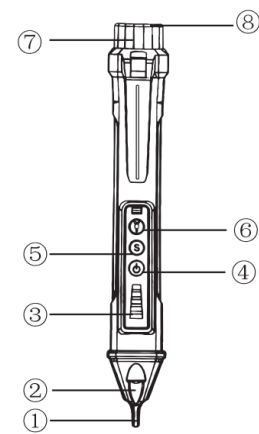

- ① Probe (NCV sensor head)
- ② Probe lighting
- ③ Signal strength indicator
- ④ Power switch key of the tester
- ⑤ Sensitivity adjustment key
- ⑥ Flashlight key
- ⑦ Flashlight and battery cover combination

## Stock Code

No.	Description
HWTVPD.CCM	CCM CC12D VOLTAGE DETECTOR

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.